Piping Systems for the Oil & Gas Industry

by **KOVANCO**Piping System



High Temperature Systems up to 1100°F (600°C)

- (A) Above Ground Composite Insulation System
- (B) Below Ground Conduit/Air Space System
- (E) Vacuum Insulated Piping for Applications -452°F (-269°C)

Low Temperature, LNG & Cryogenic Systems up to -297°F (-183°C) to 400°F (204°C)

- (C) Above Ground Insulated & Jacketed System
- (D) Below Ground Insulated & Jacketed System

(F) Double Wall Containment Piping Systems




Pre-Engineered & Pre-Fabricated for:

Oil
Fuel
Petrochemical
LNG & Vent Gas

Rovanco Piping for the Oil & Gas Industry is available with a wide array of options & configurations engineered to meet your specific application & requirements.

- Carrier pipe can be welded or seamless; stainless or carbon steel; & available in 1/2" 36" diameter.
- Insulation can be high temperature polyisocyanurate foam; Pyrogel® XT-E; Pyrogel® HPS; Cryogel® or Vacuum Insulated for cryogenic applications.
- Outer containment or conduit casings can be stainless steel; spiral welded carbon steel with Rhinocoat fusion bonded epoxy for below ground or red mil coating for above ground; High Density Polyethylene (HDPE); or spiral lock seam aluminum, galvanized or stainless steel for above ground applications.

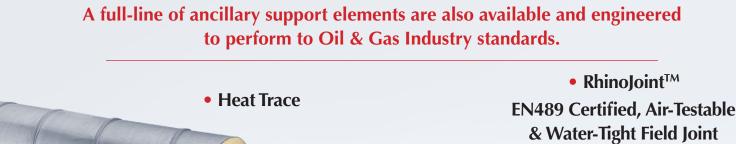

• Leak Detection



#06172025

20535 S.E. Frontage Road • Joliet, Illinois 60431 (815) 741-6700 • marketing@rovanco.com