


Rhino-Shield Double Wall Containment Piping

by **Rovanco**[®]

Piping Systems

ISO 9001:2015
CERTIFIED COMPANY

 **PRI Registrar**
PERFORMANCE REVIEW INSTITUTE

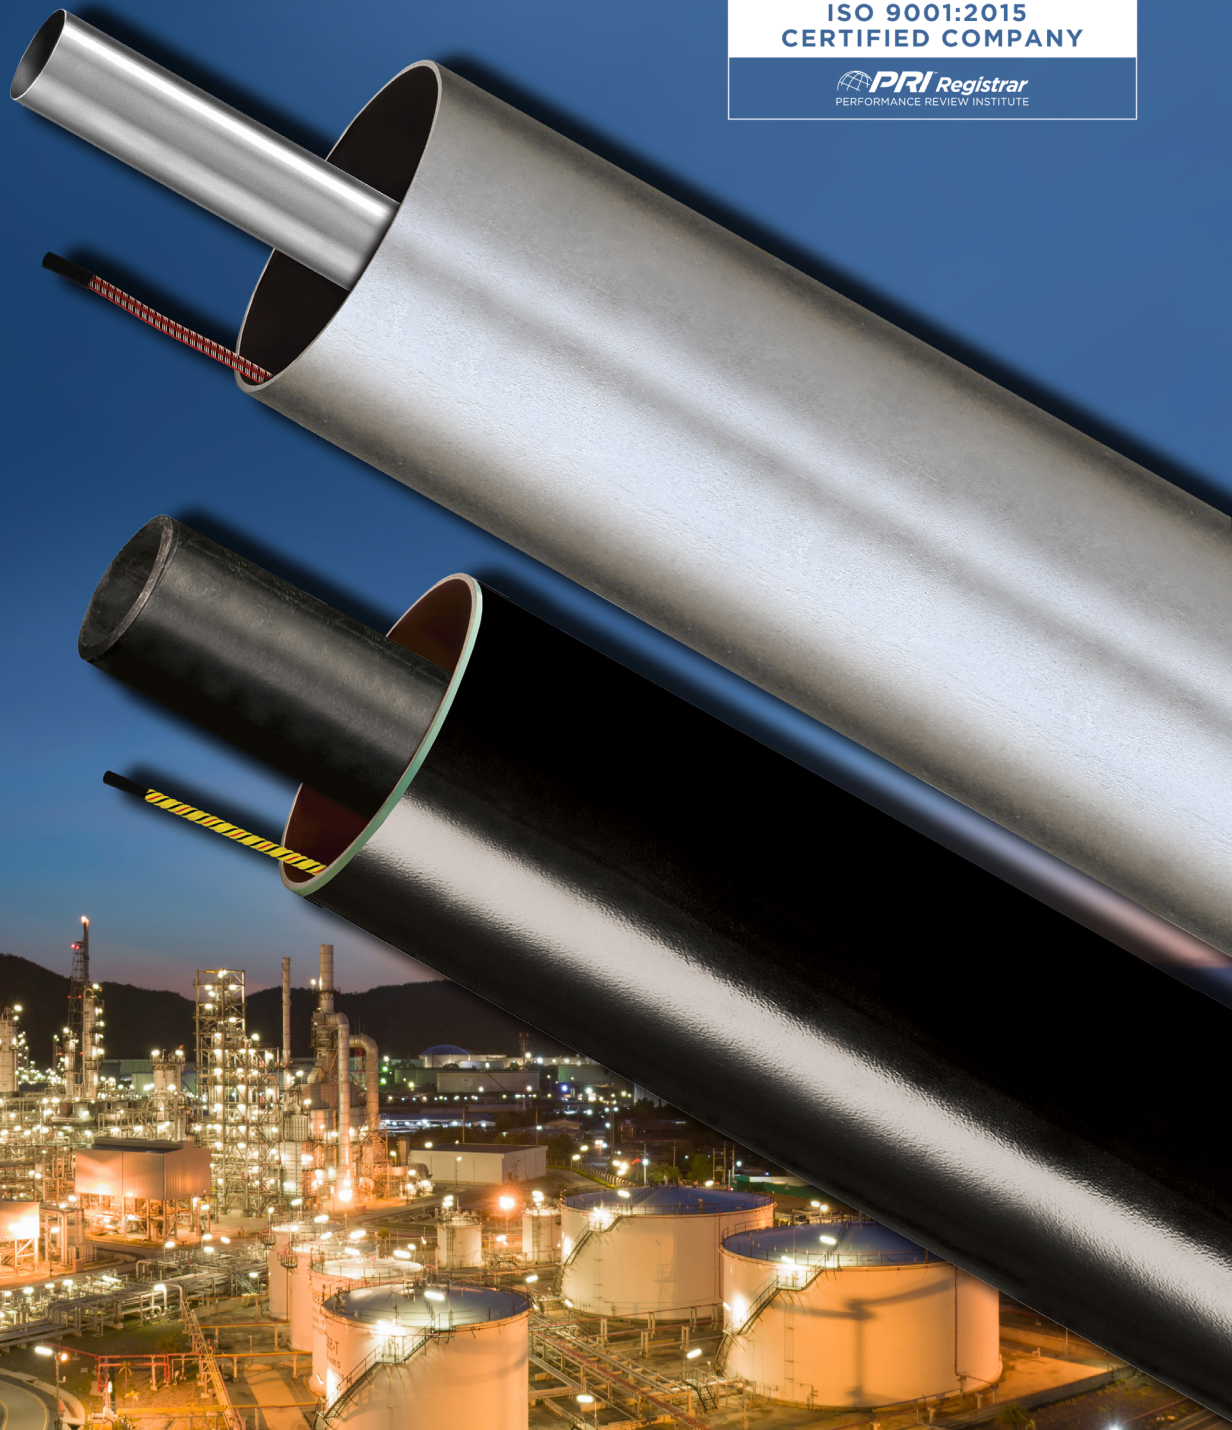

www.Rovanco.com

Pre-Engineered & Pre-Fabricated for:

- Fuel
- Oil
- Chemicals
- Process Fluids
- Vent Gas
- Hazardous Waste

Rhino-Shield Features:

- **Stainless Steel or Carbon Steel Carrier Pipe**
 - Stainless Steel; Schedule 10 or Schedule 20
 - ASTM A106 Grade B SMLS
 - ASTM A53 Grade B ERW
 - ASTM A333 Grade 6 SMLS
 - Available in 1/2" to 36" diameter
- **Above Ground Outer Containment**
 - Spiral Lock Seam Galvanized, Aluminum or Stainless Steel Metal
 - ASTM A139 Grade B Spiral Welded Carbon Steel with Rhinocoat® or Red Mil Primer
- **Below Ground Outer Containment**
 - HDPE: Water-tight; thickest (0.175") available in the industry; conforming to ASTM D3350; Type III, Category 5, Class C; & Grade P23/P34
 - Carbon Steel with Rhinocoat® Fusion Bonded Epoxy Coating
 - Stainless Steel; Schedule 10 or Schedule 20
- **Optional Carrier Pipe Insulation**
 - Polyisocyanurate (PIR) Foam (25/50 Flame/Smoke Rated per ASTM E84)
- **Optional Leak Detection for Various Types of Liquids**
- **Optional Heat Trace with Insulation**

20535 S.E. Frontage Road • Joliet, Illinois 60431
(815) 741-6700 • marketing@rovanco.com