


Above Ground Pre-Insulated Foam with Fusio-technik® PP-RCT125

The only approved industrial strength pipe of its kind made for long-term durability in high temperature/pressure applications

- Hot & Cold Fluids
- Potable Fluids
- Non-Potable Fluids

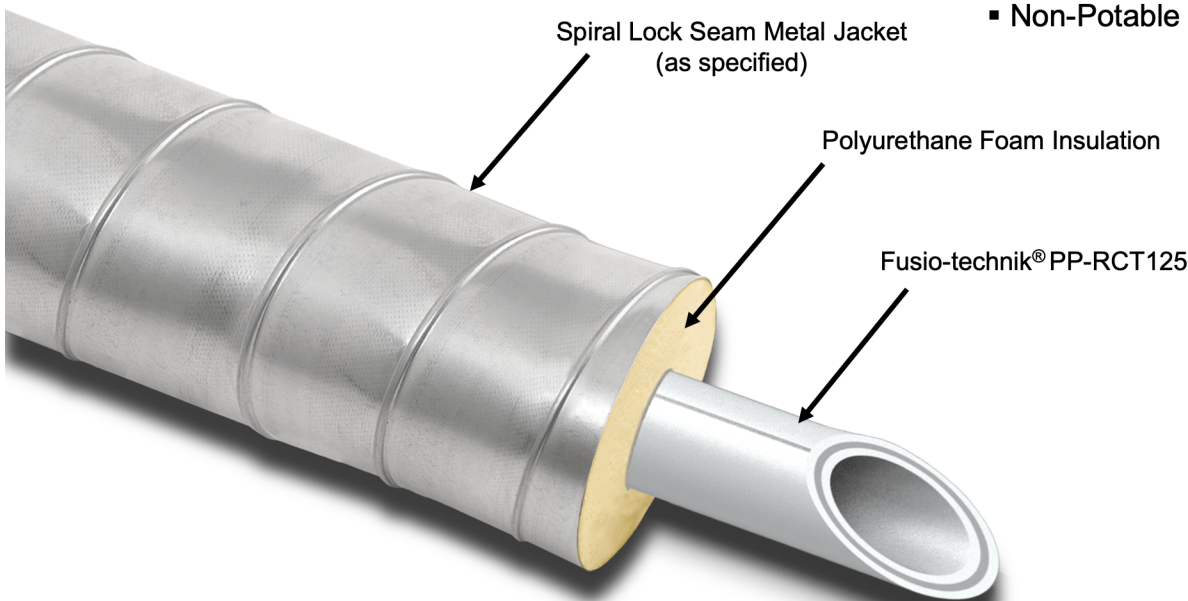

Rovanco's® Pre-Insulated Above Ground piping system with Fusio-technik® PP-RCT125 WOR carrier pipe is designed to be the most efficient, constructible and sustainable piping system for most plant systems, hot/cold fluids, potable and non-potable fluids and other below ground applications.

The Fusio-technik® PP-RCT125 carrier pipe is produced using White Oxidation Resistance (WOR) and is resistant to lime, cement, plaster and electro-chemical reaction. It leads the market for high flow rate & low pressure drop applications, has reduced permeability to oxygen and is completely compatible with warm and cold fluids as well as drinking water.

Carrier pipe insulated with polyurethane foam is encased in a spiral lock-seam metal jacket completes the piping system, available in aluminum, stainless or galvanized steel in accordance with ASTM A366 and ASTM A256 G90.

To find out more about Rovanco's® Pre-Insulated Above Ground piping with Fusio-technik® PP-RCT, you can visit our factory, phone us (815) 741-6700, visit our website at www.rovanco.com or e-mail us at marketing@rovanco.com.

ISO 9001:2015
CERTIFIED COMPANY

PRI Registrar
PERFORMANCE REVIEW INSTITUTE

This is a generic product datasheet and is not intended for submittal use.

SPECIFICATION FOR Above Ground Pre-Insulated Foam with Fusion-Technik PP-RCT125 Carrier

Carrier Pipe:

Pipe shall be manufactured by Aquatechnik® Polypropylene Random Co-Polymer, Fusio-technik® PP-RCT 125WOR resin meeting the short-term properties and long-term strength requirements of ASTM F 2389-17 and contain “White Oxidative Resistance”, (WOR). The pipe shall contain no rework or recycled materials and manufactured only from “virgin” resins. All pipes shall be made in a three-layer extrusion process. All pipes shall comply with the rated pressure requirements of ASTM F 2389-17. All pipe shall be certified as complying with NSF 14, NSF 61, NSF 51, ASTM F 2389-17 and CSA B137.11.

Carrier Pipe Fittings:

Injection molded fittings shall be provided on all fittings through 12” diameter unless otherwise approved as a “custom fitting” and manufactured from a high-quality Polypropylene Random Co-Polymer, PP-R Super 80 SDR5 resin meeting the short-term properties and long-term strength requirements of ASTM F 2389-17A. The fittings shall contain no rework or recycled materials and manufactured only from “virgin” resins. All fittings shall be certified by as complying with NSF 14, NSF 61, NSF 51 and ASTM F 2389 or CSA B137.11. Fittings larger than 12” diameter shall be fabricated by Aquatechnik® North America using the same piping material furnished for the piping application and complying with NSF 14, NSF 61, NSF 51 and ASTM F 2389-17 or CSA B137.11.

Insulation:

Insulation shall be a polyurethane foam injected with one shot into the annular space between carrier pipe and jacket. Insulation shall be rigid, minimum 90% closed cell polyurethane with a minimum 2.0 lbs per foot³ density, compressive strength of 30 psi @ 75°F and a thermal conductivity K factor no higher than 0.180 @ 75°F per ASTM C-518. Maximum operating temperature of urethane foam shall not exceed 250°F.

Insulated Fittings & Joints:

All straight joints and fitting joints shall be insulated using material supplied by system manufacturer.

Outer Jacket Fitting:

Provide metal covers designed to fit snugly on the jacketing to provide a watertight closure. All covers shall be banded in place with 3/8” wide aluminum or stainless steel straps and will be the same thickness as the jacketing.

Jacketing Material:

Shall be spiral lock seam aluminum, galvanized steel or stainless steel in accordance with ASTM A366 and ASTM A256 G90 or as specified for above ground applications. See **Table 1** for metal jacket thickness.

Table 1:

Jacket Size In Inches	Aluminum Jacket Spiral Seam with impact & chemical resistance equivalent to H-14 Temper T-3003 in accordance with ASTM-B 313.	Stainless & Galvanized Steel Jacket Spiral Seam in accordance with ASTM A-366 ASTM A-26 G90.
4	22 Gauge	26 Gauge
6	22 Gauge	26 Gauge
8	22 Gauge	26 Gauge
10	22 Gauge	26 Gauge
12	22 Gauge	26 Gauge
14	18 Gauge	22 Gauge
16	18 Gauge	22 Gauge
18	18 Gauge	22 Gauge
20 & larger	18 Gauge	22 Gauge

Manufacturer’s Assistance:

Rovanco® will provide a field service man on-site to properly train the installing personnel in all phases of installation, (if required).

Approved Vendor:

The Rovanco® Pre-Insulated Above Ground Foam Piping System is engineered with Fusio-technik® PP-RCT 125 carrier pipe. All other manufacturers wishing to bid on this project must be ISO 9001 Certified and provide the engineer with certified test data from either foam manufacturer or an independent testing agency that the product is capable of withstanding the service temperature continuously. The manufacturer shall obtain written approval from the engineer 10 days prior to bid date.

Contact our home office or local representative for insulation sizing.

cc #10162025

Copyright 2025 – Rovanco’s products are covered by various U.S. patents. Rovanco & Insul-8 are federally registered trademarks.

Contact Rovanco® for the name of your local Representative

20535 S.E. Frontage Road • Joliet, Illinois 60431 • (815) 741-6700

Website: www.rovanco.com • E-mail: marketing@rovanco.com

This is a generic product datasheet and is not intended for submittal use.