
Rovanco Hi-Temp Elite Systems

High Temperature Above Ground (1100˚F, 600˚C)

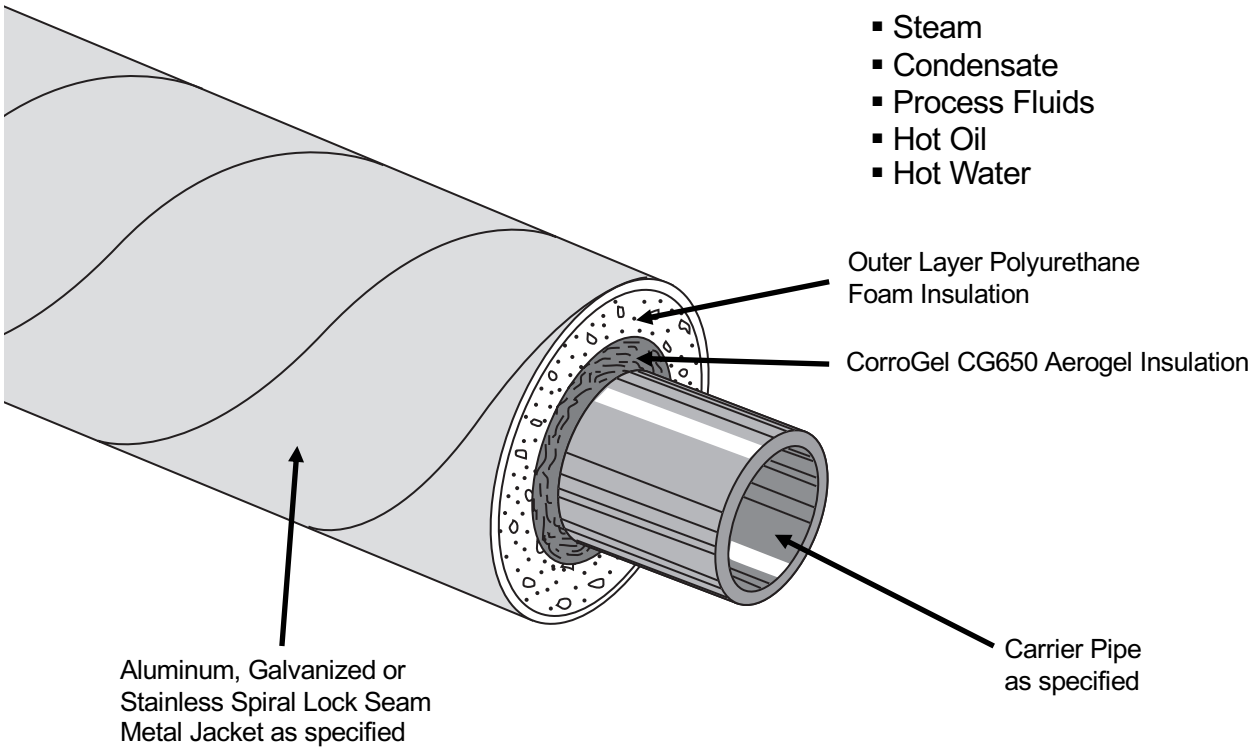

- Steam
- Condensate
- Process Fluids
- Hot Oil
- Hot Water

Rovanco's Hi-Temp Elite is designed for piping systems above ground suitable for indoor or outdoor applications. Polyurethane foam insulation and durable metal jacket supplied in 20' or 40' lengths, means an economical, high-quality system.

Rovanco's Hi-Temp Elite is provided with a spiral lock seam on a metal jacket of aluminum or galvanized steel. These jackets can be supported from the outside with maximum support spans and minimum guides. Fittings can be field insulated with material supplied by Rovanco.

The Hi-Temp Elite System comes complete with metal cover, insulation, sealant and banding to make the installation completely watertight for above grade applications.

Rovanco's Hi-Temp Elite System can be used up to 1100ºF (600˚C).

To find out more about Rovanco's Hi-Temp Elite System, you can visit our factory, phone us (815) 741-6700, fax us (815) 741-4229, visit our website at www.rovanco.com or e-mail us at marketing@rovanco.com.

This is a generic product datasheet and is not intended for submittal use.

SPECIFICATION FOR HI-TEMP ABOVE GROUND SYSTEM (1100˚F, 600˚C)

Carrier Pipe:
Shall be A-53 Grade B Schedule 40 seamless or ERW (Schedule 80 for condensate). Lengths shall be 20' or 40', random as specified.
Other metallic pipes available.

Insulation:
Inner Layer
Shall be CorroGel CG650 Hi-Temp Wrap, a nano porous & high temperature resistant glass fiber combined to make an aerogel blanket insulation. Sectional insulation shall either be banded on pipe with stainless steel banding on 18" center or shipped separately depending on insulation type. Insulation thickness shall be as specified.

Outer Layer
Insulation shall be a polyurethane foam injected with one shot into the annular space between carrier pipe and jacket. Insulation shall be rigid, minimum 90% closed cell polyurethane with a minimum 2.0 lbs per foot3 density, compressive strength of 30 psi @ 75˚F and a thermal conductivity K factor no higher than 0.180 @ 75˚F per ASTM C-518. Maximum operating temperature of urethane foam shall not exceed 250˚F.

Insulated Fitting and Joints:
All straight joints and fitting joint shall be insulated using material supplied by system manufacturer.

Jacket Fitting and Joint Cover:
Provide metal covers designed to fit snugly on the jacketing to provide a watertight closure. All covers shall be banded in place with 3/8" wide stainless steel straps and will be the same thickness as the jacketing.

Factory pre-fabricated and pre-insulated fittings are also available.

Anchors:
All anchors will be ½" thick steel plate welded to internal pipe and sealed at jacket areas per manufacturers' recommendations.

Approved Vendors:
HT Elite Systems by Rovanco, Joliet, Illinois. All other manufacturers wishing to bid on this project must be ISO 9001 Certified and provide the engineer with certified test data from either foam manufacturer or an independent testing agency that the product is capable of withstanding the service temperature continuously. The manufacturer shall obtain written approval from the engineer 10 days prior to bid date.

* Contact our home office or local representative for insulation sizing.

Jacketing Material:

Jacket Size In Inches	Aluminum Jacket Spiral Aluminum with impact and Chemical resistance equivalent to H-14 Temper T-3003 in accordance with ASTM-B 313 specifications	Galvanized Steel Jacket Spiral Seam Galvanized Steel in accordance with ASTM A-366 ASTM A-26 G90.	Stainless Steel Jacket Spiral Seam Stainless Steel in accordance with ASTM A-366 ASTM A-26 G90.
4	22 Gauge	26 Gauge	26 Gauge
6	22 Gauge	26 Gauge	26 Gauge
8	22 Gauge	26 Gauge	26 Gauge
10	22 Gauge	26 Gauge	26 Gauge
12	22 Gauge	26 Gauge	26 Gauge
14	18 Gauge	22 Gauge	22 Gauge
16	18 Gauge	22 Gauge	22 Gauge
18	18 Gauge	22 Gauge	22 Gauge
20 & larger	18 Gauge	22 Gauge	22 Gauge

cc #01132026

Copyright 2026 – Rovanco's products are covered by various U.S. patents. Rovanco & Insul-8 are federally registered trademarks.

Contact Rovanco® for the name of your local Representative
20535 S.E. Frontage Road • Joliet, Illinois 60431 • (815) 741-6700
Website: www.rovanco.com • E-mail: marketing@rovanco.com

This is a generic product datasheet and is not intended for submittal use.